

# **IO-Link**

## **Product Quality Policy**

**Version 1.5**  
**June 2024**

**Order No: 10.132**

**File name: IO-Link-Product\_Quality\_Policy\_10132\_V150\_sep24**

This document has been prepared, approved, and released by the IO-Link Steering Committee.

**Important notes:**

NOTE 1 The IO-Link Community Rules shall be observed prior to the development and marketing of IO-Link products. The document can be downloaded from the [www.io-link.com](http://www.io-link.com) portal.

NOTE 2 Any IO-Link Device shall provide an associated IODD file. Easy access to the file and potential updates shall be possible. It is the responsibility of the IO-Link Device manufacturer to test the IODD file with the help of the IODD-Checker tool available per download from [www.io-link.com](http://www.io-link.com).

NOTE 3 Any IO-Link devices shall provide an associated manufacturer declaration on the conformity of the device. A corresponding form with references to relevant documents is available per download from [www.io-link.com](http://www.io-link.com).


**Disclaimer:**

The attention of adopters is directed to the possibility that compliance with or adoption of IO-Link Community specifications may require use of an invention covered by patent rights. The IO-Link Community shall not be responsible for identifying patents for which a license may be required by any IO-Link Community specification, or for conducting legal inquiries into the legal validity or scope of those patents that are brought to its attention. IO-Link Community specifications are prospective and advisory only. Prospective users are responsible for protecting themselves against liability for infringement of patents.

The information contained in this document is subject to change without notice. The material in this document details an IO-Link Community specification in accordance with the license and notices set forth on this page. This document does not represent a commitment to implement any portion of this specification in any company's products.

WHILE THE INFORMATION IN THIS PUBLICATION IS BELIEVED TO BE ACCURATE, THE IO-LINK COMMUNITY MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL INCLUDING, BUT NOT LIMITED TO ANY WARRANTY OF TITLE OR OWNERSHIP, IMPLIED WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR PARTICULAR PURPOSE OR USE.

In no event shall the IO-Link Community be liable for errors contained herein or for indirect, incidental, special, consequential, reliance or cover damages, including loss of profits, revenue, data or use, incurred by any user or any third party. Compliance with this specification does not absolve manufacturers of IO-Link equipment, from the requirements of safety and regulatory agencies (TÜV, IFA, UL, CSA, etc.).

 **IO-Link**® is registered trademark. The use is restricted for members of the IO-Link Community. More detailed terms for the use can be found in the IO-Link Community Rules on [www.io-link.com](http://www.io-link.com).

**Conventions:** In this specification the following key words (in **bold** text) will be used:

<b>may:</b>	indicates flexibility of choice with no implied preference.
<b>should:</b>	indicates flexibility of choice with a strongly preferred implementation.
<b>shall:</b>	indicates a mandatory requirement. Designers <b>shall</b> implement such mandatory requirements to ensure interoperability and to claim conformity with this specification.
<b>highly recommended:</b>	indicates that a feature shall be implemented except for well-founded cases. Vendor shall document the deviation within the user manual and within the test report.

Publisher:

**IO-Link Community**

c/o PROFIBUS Nutzerorganisation

Ohiostrasse, 8

76149 Karlsruhe

Germany

Phone: +49 721 / 986 197 49

Fax: +49 721 / 986 197 11

E-mail: [info@io-link.com](mailto:info@io-link.com)

Web site: [www.io-link.com](http://www.io-link.com)

© No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

## CONTENTS

Management summary – scope of this document .....	4
Overview of related documents .....	4
Terms, definitions, and abbreviated terms .....	5
3.1 Terms and definitions .....	5
3.2 Symbols and abbreviated terms .....	6
Manufacturer declaration.....	6
4.1 General rules .....	6
4.2 The way to manufacturer declaration (MD) .....	6
4.2.1 Steps for IO-Link members .....	6
4.2.2 Steps for non IO-Link members (licensee) .....	7
4.3 Additional procedures regarding re-testing .....	7
4.3.1 General approach .....	7
4.3.2 Devices.....	7
4.3.3 Masters.....	7
Testing and test tools.....	8
5.1 Prerequisites for type testing .....	8
5.2 Test of an IODD (only for Devices) .....	8
5.3 Test of the physical layer (PL) and EMC .....	8
5.4 Test of the Protocol .....	8
5.5 Tools for testing .....	8
Quality center .....	9
Bibliography.....	10
Figure 1 – Related documents .....	4
Table 1 – Subject of IO-Link's technical and policy documents .....	4
Table 2 – Consequences of changes to the Device interface .....	7
Table 3 – Consequences of changes to the Master interface .....	7
Table 4 – Prerequisites for type testing.....	8

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28

# IO-Link Product Quality Policy – Organization and procedures

## Management summary – scope of this document

This policy describes the necessary procedures on how to attain a manufacturer declaration for an IO-Link Master or Device and shall ensure the product quality.

Furthermore, in clauses 4 and 5 it gives hints

- for the successful preparation of testing,
- steps to create a manufacturer declaration,
- for brand labelling.

## Overview of related documents

The IO-Link Community uses a set of policies to organize work of its members, providers, and test centers and to maintain quality assurance (mainly interoperability) of member products as shown in Figure 1. The technical specifications ([2], [3], and [4]) are building a technical platform for a certain generation of Devices and Masters. Consistent versions of the specifications are bundled to a Package and supposed to stay stable for several years.

The quality of products is stated only by a Manufacturer Declaration based on tests and referenced test reports.

All IO-Link implementations shall use valid specifications at that time. All valid specifications and documents are available on IO-Link.com and listed in [10]

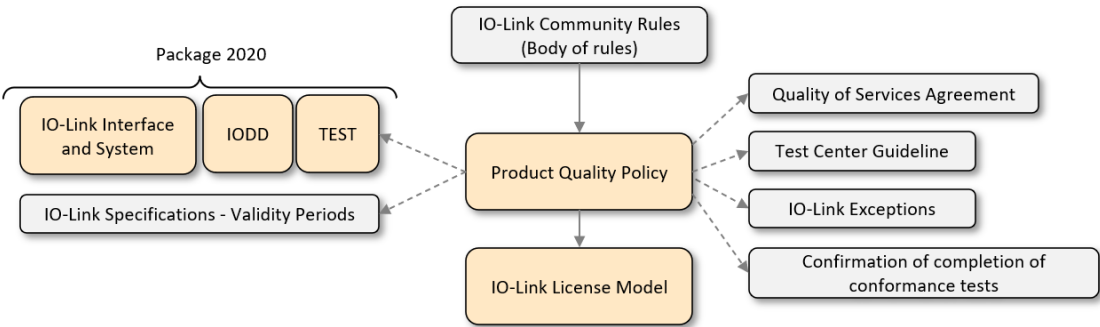


Figure 1 – Related documents

Table 1 provides information on IO-Link's technical and policy documents.

Table 1 – Subject of IO-Link's technical and policy documents

Title of document	Subject	Ref
IO-Link Interface and System	Specification of IO-Link interface, communication, and engineering technology	[1], [2]

Title of document	Subject	Ref
IO-Link IO Device Description	Specification of IO-Link Device parameters in a formal language (XML)	[3]
IO-Link Test	Specification of TestCases for physical tests and behavioral tests for Devices and Master	[4]
IO-Link Community Rules (Body of rules between IO-Link members and the PNO)	This document governs the cooperation between IO-Link members or licensees and the PNO and describes the rights and obligations of the partners.	[5]
IO-Link License Model	This document describes the license model for non-IO-Link members.	[6]
Quality of Services Agreement	This document is an agreement between IO-Link Community and the IOL-Competence Centers (IOLCC) for the technologies of IO-Link to assure quality of services.	[7]
Test Center Guideline	This document describes the preconditions for becoming a test laboratory approved by IO-Link community. It additionally describes the rules for the performance of such an IOL Test Center (IOLTC).	[8]
IO-Link Exceptions	This document describes the change and exception management in case of implementation or test deviations.	[9]
IOL SpecificationValidity	This document contains a list of all valid specifications and their validity phase out with transition periods	[10]
Confirmation of completion of conformance tests	This document is the test confirmation of an IOL Test Center (IOLTC) or a brand label provider.	[11]

29

## 30 Terms, definitions, and abbreviated terms

### 31 3.1 Terms and definitions

32 For the purposes of this document, the terms and definitions given in [2], [3], and [4], as well  
33 as the following apply.

#### 34 3.1.1

##### 35 IO-Link specifications

36 This are system specification, system extensions, profile specifications, IODD specification and  
37 related test specifications

#### 38 3.1.2

##### 39 IO-Link Service Center

40 Central office of the IO-Link community, see publisher

#### 41 3.1.3

##### 42 Approved component list

43 The Approved component list comprises all devices with available IODDs by publishing the MD  
44 on the community hosted IODDfinder

#### 45 3.1.4

##### 46 Master Tester

47 Tool, intended to perform test cases for IO-Link Master according to the IO-Link test specifica-  
48 tion, approved by IO-Link quality authorities

#### 49 3.1.5

##### 50 Device Tester

51 Tool, intended to perform test cases for IO-Link Devices according to the IO-Link test specifi-  
52 cation, approved by IO-Link quality authorities

#### 53 3.1.6

##### 54 IODD

55 electronic I/O and parameter description in XML of an IO-Link Device for its configuration and  
56 parameterization to match certain application requirements

57 **3.1.7**  
58 **DeviceID**  
59 unique IO-Link Device identification allocated by a vendor

60 **3.1.8**  
61 **VendorID**  
62 unique vendor identification assigned by the IO-Link Community

63 **3.1.9**  
64 **MasterID**  
65 unique IO-Link Master identification allocated by a vendor

## 66 **3.2 Symbols and abbreviated terms**

IOLCC	IO-Link Competence Center
IOLTC	IO-Link Test Center
DUT	Device under test
MD	Manufacturer declaration

## 67 **Manufacturer declaration**

### 68 **4.1 General rules**

- 69 • The Manufacturer Declaration states compliance to the IO-Link specifications and shall be  
70 signed by vendors and made available to customers.
- 71 • For the reason of functionality and interoperability, the implementation of the common profile  
72 (part identification and diagnosis) is highly recommended.
- 73 • Profiles shall be implemented and tested according to the profile specifications.
- 74 • Brand labeled products require the Vendor ID (VID) of the branding company.

75  
76 Important note:

77 Exceptions for not implemented "highly recommended" features specified in [2] or profiles shall  
78 be documented within the user manual and the manufacturer declaration.

- 79 • Exceptions against the IO-Link specifications shall be handled according the rules defined  
80 in [9].
- 81 • Members are entitled to perform the required tests under their own responsibility. The Man-  
82 ufacturer Declaration has no expiring date.
- 83 • Non-members are obliged to provide a signed document "Confirmation of completion of con-  
84 formance tests" [11] to the IO-Link Service Center to get an IO-Link licence. See IO-Link  
85 License Model [6].
- 86 • For extensions like IO-Link Safety or IO-Link Wireless different MDs may be required.

### 87 88 **4.2 The way to manufacturer declaration (MD)**

89 The preconditions for an MD are:

- 90 • Each family of Devices or Masters shall be well defined to be listed later in the MD,
- 91 • Prerequisites for Devices are VendorID, DeviceID and IODD,
- 92 • Prerequisite for Master are VendorID and MasterID

#### 93 94 **4.2.1 Steps for IO-Link members**

- 95 1) Execute IO-Link conformance tests successfully and completely.

- 96 2) Fill out and sign the MD.  
 97 3) Add the MD to the Approved component list.

98  
 99 **4.2.2 Steps for non IO-Link members (licensee)**

- 100 1) Contact an IO-Link Test Center or the brand label provider to get the "Conformance test  
 101 commitment for licences" to apply for a VendorID (see [6]).  
 102 2) Apply for a VendorID at the IO-Link Service Center.  
 103 3) Ask IO-Link Test Center or the brand label provider for the "Confirmation of completion  
 104 of conformance tests" (see [11]).  
 105 4) Fill out and sign the MD.  
 106 5) Provide the MD and the "Confirmation of completion of conformance tests" (see [11]) to  
 107 the IO-Link Service Center to get the licence.  
 108 6) Add the MD to the Approved component list.

109  
 110 **4.3 Additional procedures regarding re-testing**

111 **4.3.1 General approach**

112 This clause describes the recommendations for re-testing whenever changes have been made  
 113 at an already tested Device or Master. Either a full test or a partial test shall be performed. This  
 114 leads to a new test report and a corresponding MD.

115 Due to the increasing complexity of Device variants, the following clause can only cope with  
 116 fundamental deviations of the IO-Link interface (communication and/or timing). Other deviations  
 117 should be negotiated between manufacturer and an IOLTC.

118 **4.3.2 Devices**

119 Table 2 shows the consequences of fundamental changes/deviations in a Device.

120 **Table 2 – Consequences of changes to the Device interface**

Changes/deviations	New DeviceID	Physical layer test	EMC test	Protocol test	New MD
Software changes in application new functions / parameters	X			X	X
Software changes influencing communication / timing	X	X		X	X
Hardware changes influencing communication		X	X		X
NOTE Communication software is part of the Device software, which represents the implementation of the protocol layers, data objects, methods and interfaces as defined in [2].					

121  
 122 **4.3.3 Masters**

123 Table 3 shows the consequences of fundamental changes/deviations in a Master.

124 **Table 3 – Consequences of changes to the Master interface**

Changes/deviations	New MasterID	Physical layer test	EMC test	Protocol test	New MD
Software changes influencing communication / timing	X	X		X	X

Hardware changes influencing communication		X	X	X	X
NOTE Communication software is part of the Master software, which represents the implementation of the protocol layers, data objects, methods and interfaces as defined in [2].					

125

126 **Testing and test tools**127 **5.1 Prerequisites for type testing**

128 Table 4 shows the prerequisites for type testing of Device and Master.

129

**Table 4 – Prerequisites for type testing**

Type	Final product before release	IODD (checked, stamped)	VendorID	DeviceID	MasterID
Device	X	X	X	X	–
Master	X	–	X	–	X

130

131 **5.2 Test of an IODD (only for Devices)**

132 Every Device manufacturer shall provide an IODD file for the DUT. The IODD describes the  
133 features of a Device (I/O data structures and parameters), which are also used by Device test-  
134 ers for protocol tests.

135 The correctness of the IODD file shall be tested with the help of the actual version of the IODD  
136 checker.

137 **5.3 Test of the physical layer (PL) and EMC**

138 The PL and EMC tests shall be performed according to [2] and [4].

139 **5.4 Test of the Protocol**

140 The protocol test shall be performed according to [4]. In case of Devices a checked IODD shall  
141 be used for the test.

142 **5.5 Tools for testing**

143 There are several test systems on the market supporting tests and generating test reports,  
144 which are approved by the IO-Link quality authority.

145 These test systems comprise

- 146 • Physical layer tester
- 147 • EMC tester
- 148 • Device tester (protocol)
- 149 • IODD checker
- 150 • Master tester

151



152 **Quality center**

153 The IO-Link community is operating a Quality Center for the clearing of MD relevant quality  
154 complaints.

155 Complaints shall be reported in english language via e-mail to [quality@io-link.com](mailto:quality@io-link.com).

156

157

158

## Bibliography

159

160

161 [1] IEC 61131-9, Programmable controllers – Part 9: *Single-drop digital communication in-*  
162 *terface for small sensors and actuators (SDCI)*

163 [2] IO-Link Community, *IO-Link Interface and System*, Order No. 10.002

164 [3] IO-Link Community, *IO Device Description (IODD)*, Order No. 10.012

165 [4] IO-Link Community, *IO-Link Test*, Order No. 10.032

166 [5] IO-Link Community, *IO-Link Community Rules (Body of Rules)*, Order No. 3.702

167 [6] IO-Link Community, *IO-Link License Model*, Order No. 10.302

168 [7] IO-Link Community, *IO-Link Quality of Services Agreement*, Order No. 10.052

169 [8] IO-Link Community, *IO-Link Test Center Guideline*, Order No. 10.142

170 [9] IO-Link Community, *IO-Link Exceptions*, Order No. 10.232

171 [10] IO-Link Community, *IOL\_SpecificationValidity*, Order No. 10.312

172 [11] IO-Link Community, *Confirmation of completion of conformance tests*,

173 Order No. 10.412

174

175

© Copyright by:

IO-Link Community  
c/o PROFIBUS Nutzerorganisation e.V.  
Ohiostrasse. 8  
76149 Karlsruhe  
Germany

Phone: +49 721 / 986 197 49

Fax: +49 721 / 986 197 11

e-mail: [info@io-link.com](mailto:info@io-link.com)

<http://www.io-link.com/>